




INTERNATIONAL INC.

New!

Web Widths: 13", 16", 20"
Maximum Roll Diameter: 10"
Core Diameters: 1" – 3"
Line Speed: To 500 FPM
Electrical: 220 Volts, 3 phase

Model "VTR" - Value Turret Rewinder

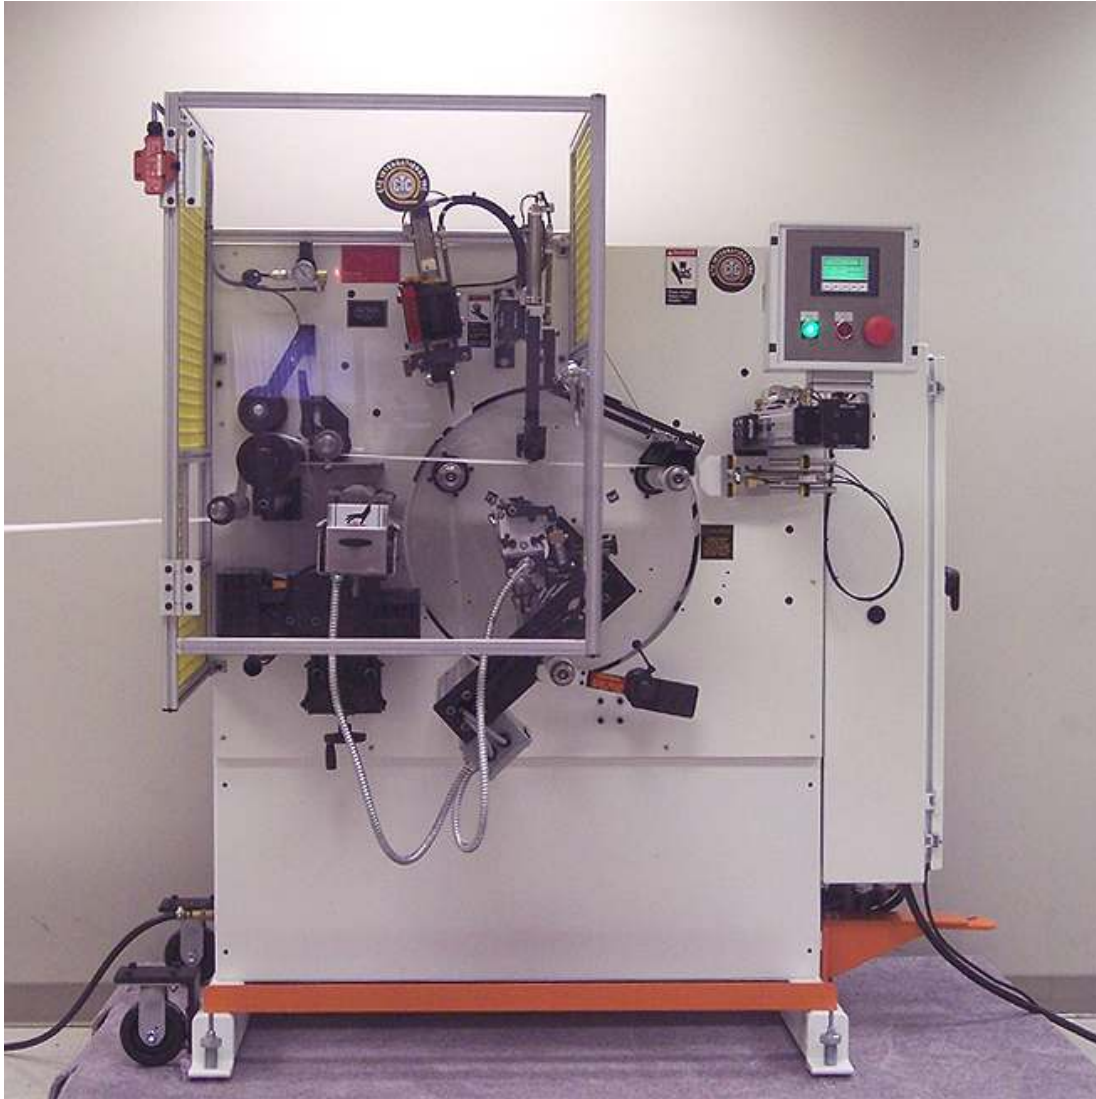

Standard Features

- Rugged steel plate construction
- Fastest job change over system (Single bolt air shaft changeover)
- Fast operator learning curve
- Compact design
- Shortest web part for simplest set-up
- Slide out core glue pot with "doctor blade" glue wheels
- Just in Time core gluing for fugitive glues
- Automatic Tail Glue
- No mechanical connection needed between the turret and the press
- Cantilever Construction
- 3" Air Shafts with bleeder valves for instant core re-positioning
- Auto air shaft inflate/deflate system

- Industry standard PLC Control
- Count in feet or meters
- Press e-stop connection
- Interlocked Safety Guarding
- Accurately sized air shafts for best finished roll quality
- Auto swing-back core stop
- Left or right hand models available

Options

- Automatic roll eject
- Different air shaft diameters
- CE Compliance
- Precise Count/Cut between labels
- Unique tricycle gear caster system
- Telescoping Tramming bar for fast machine alignment to press