


# [ Flexible dies ]

Using state-of-the-art technology and extremely efficient processes, **wink** produces flexible dies from the highest grade materials guaranteeing minimal tolerances and maximum die life. Available with a range of finishes (MC-coating, Laser hardening, Non-stick-coating, etc.) to suit the application and material being converted. We are happy to advise you!

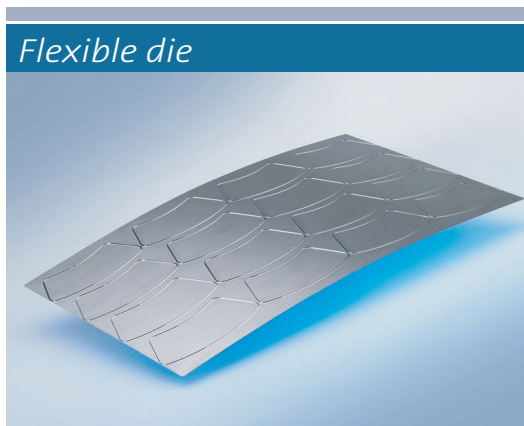

## Qualities

- „Standard“ (90° and >),  
tolerance: +/- 0,003 mm
- „Supercut“ (< 90°),  
tolerance: +/- 0,002 mm

## Finishing

- MC-coating
- MC-Plus-coating
- Non-stick-coating
- Laser hardening

## Die height

- 0,32 - 1,50 mm  
Euronorm: 0,44 mm

## Cutting angle

- 30-110 °  
(depending on material)

## Application

- rotary or flat
- paper, PE, PP, Tyvek and other materials
- thin cardboard
- sandwich material
- perforations
- microperforations
- creasing
- kiss-cut
- cut through

